

# MODULE 7: Analog Transmission

## SUMMER CHALLENGE

Electrical Engineering: Smart Lighting

Emre Ates

PhD Student

Boston University


ates@bu.edu

# Overview




- Visible Light Communication
- Audio Signals
- Amplitude Modulation
- Digital Sampling and Binary Representation
- Experiment
  - Analog Modulation with VLC Transceivers

# Visible Light Communication (VLC)

- Radio spectrum is congested, visible spectrum has potential!

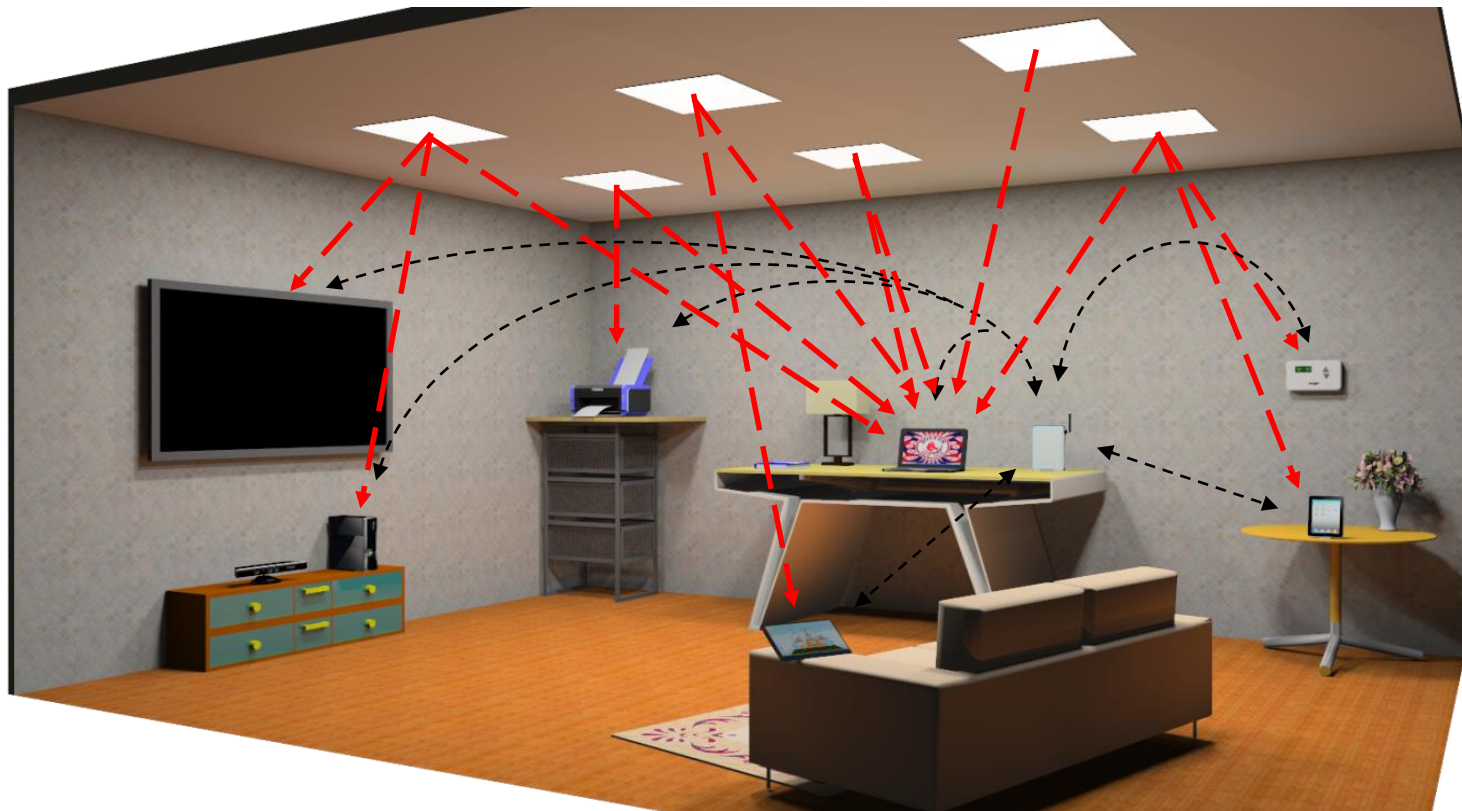


# Visible Light Communication Transceiver

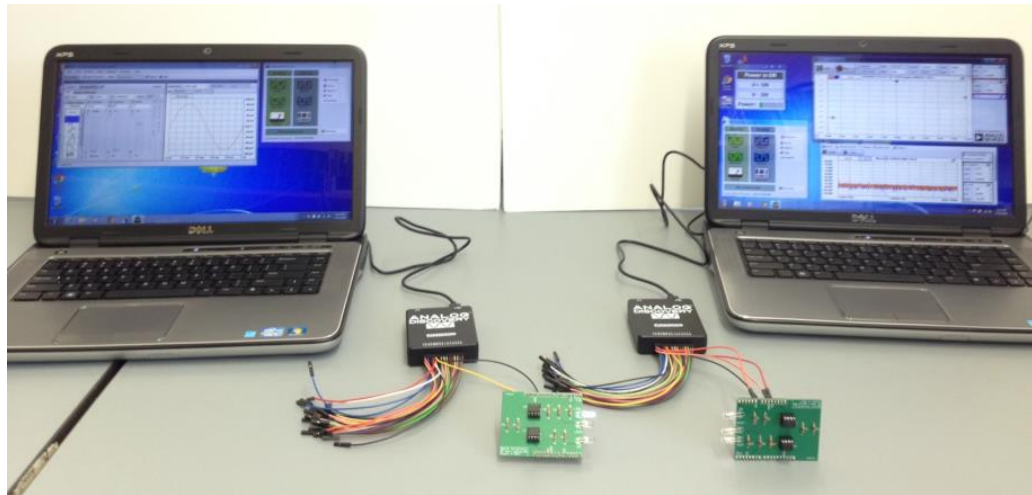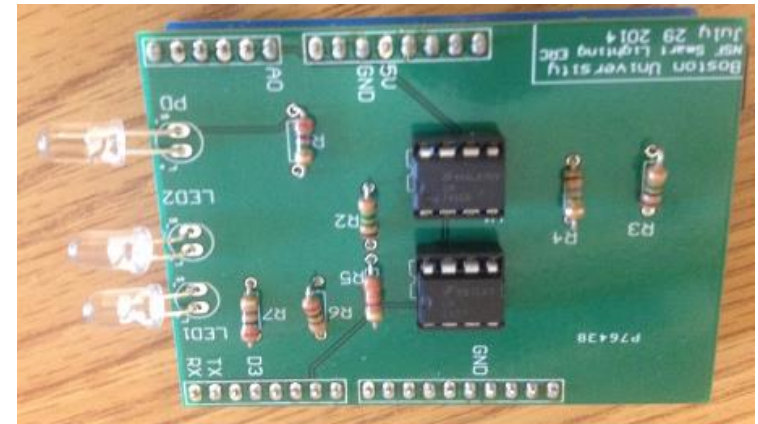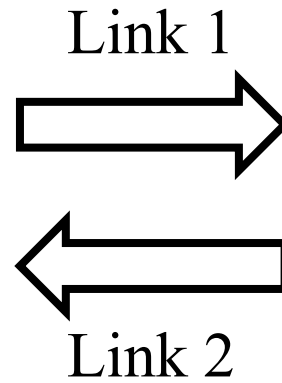

# Audio Signals

## Audio Signals


- Acoustic Input (e.g., microphone) converts air pressure variations into an electrical signal.
- ADC converts to digital data representing the *sampled* electrical signal.
- DAC converts digital samples back into a continuous time electrical signal
- Acoustic output (e.g., speaker) converts voltage back to air pressure variations.

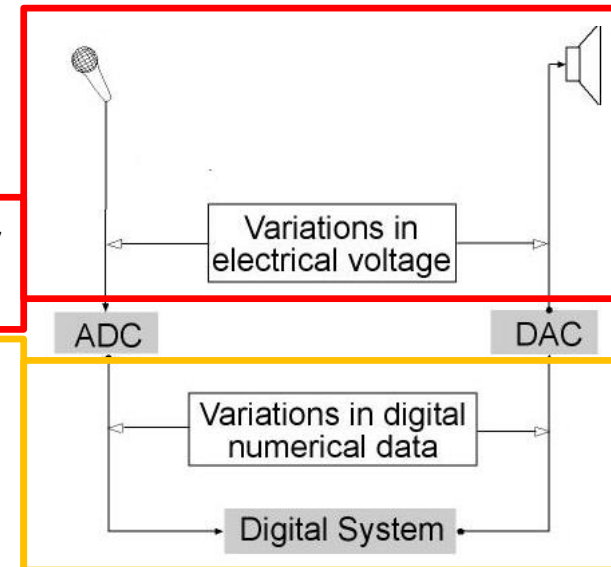

## AM Radio? FM Radio?


- AM: Amplitude Modulation
- FM: Frequency Modulation
- Sirius Satellite *Digital* Radio

Electrical signal is transmitted via electromagnetic signals at a specified *carrier frequency*.

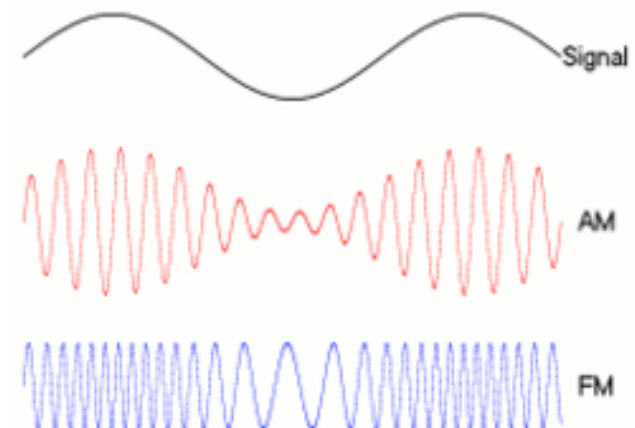

# Amplitude Modulation

- Carrier Modulation: “Placement” of information signal onto a high frequency carrier for transmission.
- Carrier Demodulation: Retrieving the baseband or low frequency signal from the carrier-modulated signal

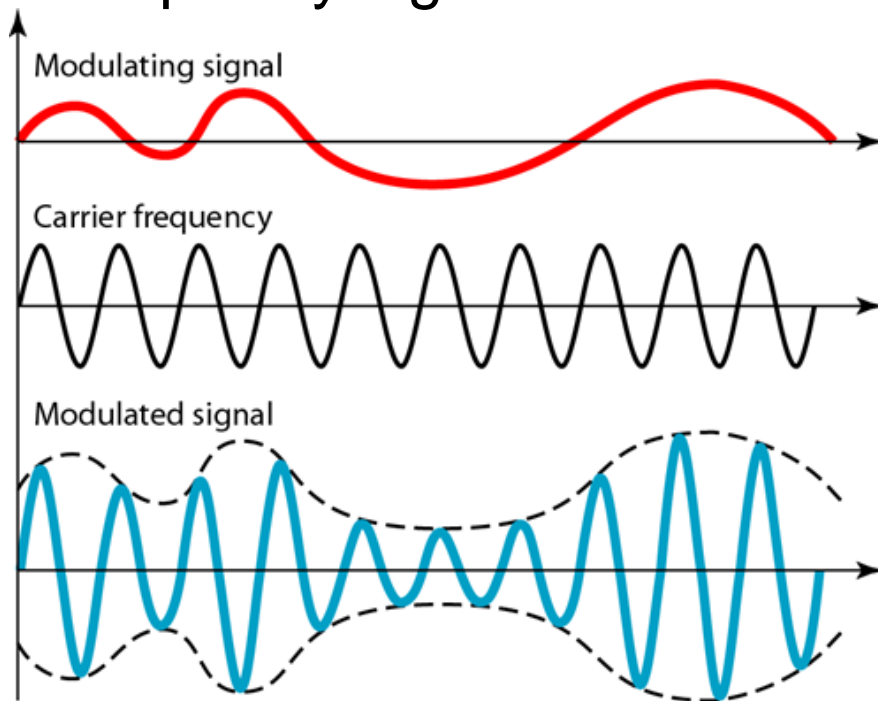


*In VLC Signals, optical intensity is modulated.*

*Carrier Frequency is NOT required. Technically, the signal is modulated in THz*

# Digital Sampling

- To convert an analog signal into a digital representation:
  - Discrete Time samples
  - Discrete value amplitude

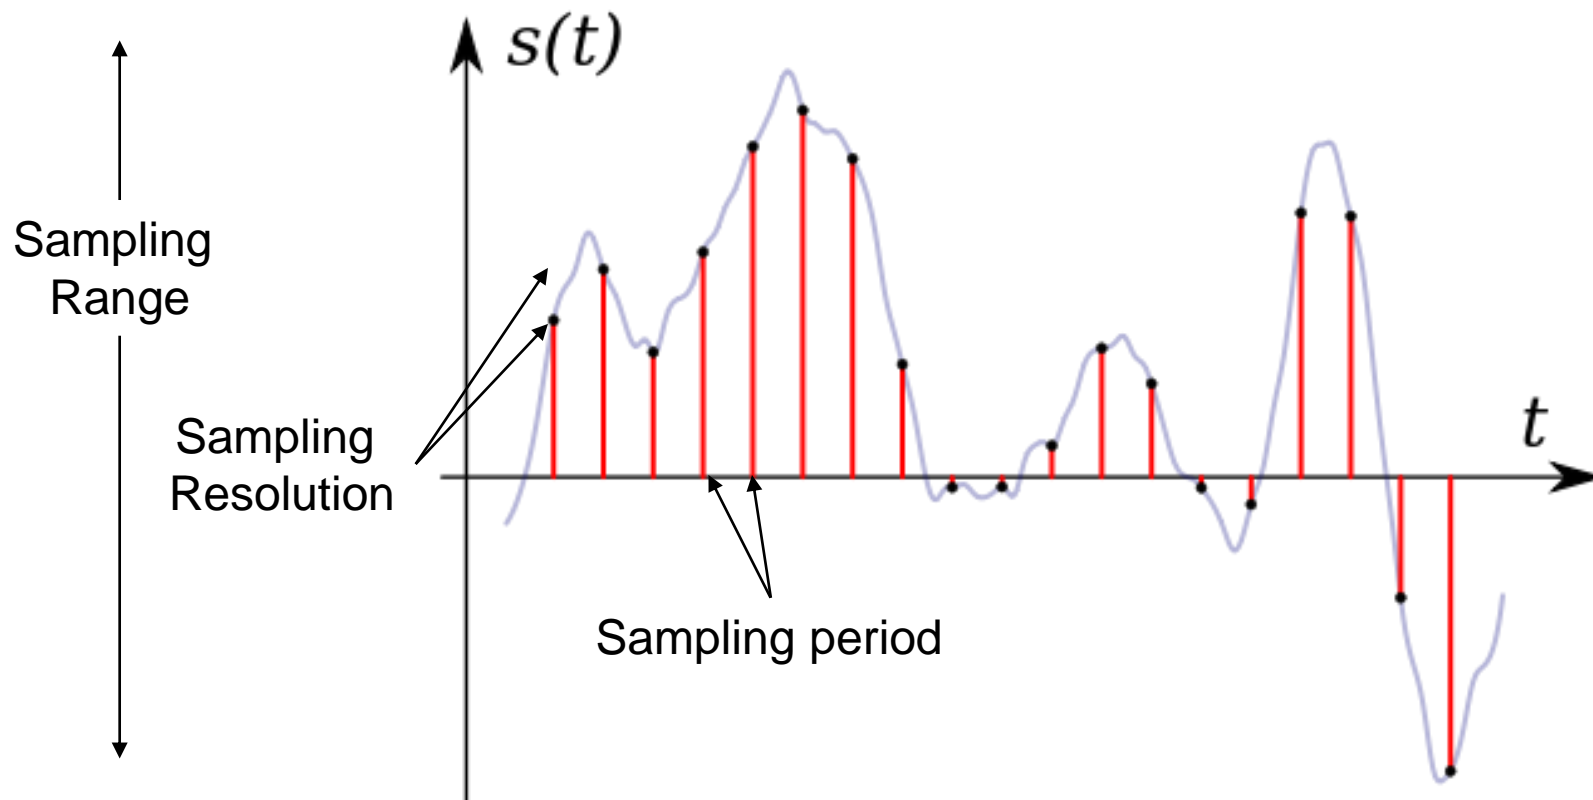


## Binary Representation

- We typically consider numbers in decimal, *base-10*

$$39512 = 3(10000) + 9(1000) + 5(100) + 1(10) + 2(1)$$

- Binary is a numeric system with *base-2*
  - Value of any digit (or *bit*) can either be '0' or '1'
  - Each digit is a power of 2 rather than a power of 10

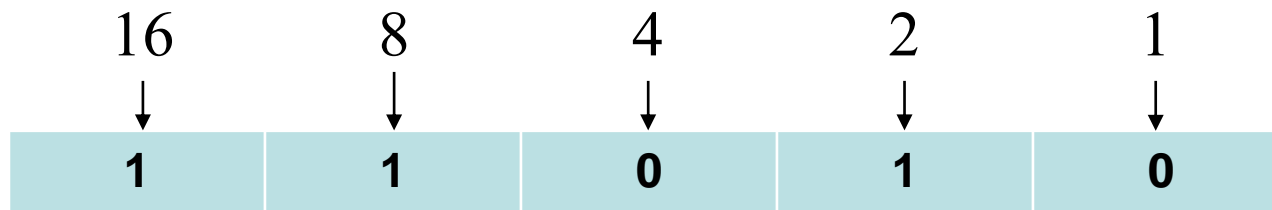

$$1(16) + 1(8) + 0(4) + 1(2) + 0(1) = 26$$

- A byte is a set of 8 bits



# Digital Sampling

- Digital sample values are stored in binary

| Binary Form |   |   |   |   | Decimal Form |
|-------------|---|---|---|---|--------------|
| 16          | 8 | 4 | 2 | 1 |              |
| 0           | 0 | 0 | 0 | 0 | 0            |
| 0           | 0 | 0 | 0 | 1 | 1            |
| 0           | 0 | 0 | 1 | 0 | 2            |
| 0           | 0 | 0 | 1 | 1 | 3            |
| 0           | 0 | 1 | 0 | 0 | 4            |
| 0           | 0 | 1 | 0 | 1 | 5            |
| 0           | 0 | 1 | 1 | 0 | 6            |
| 0           | 0 | 1 | 1 | 1 | 7            |
| 0           | 1 | 0 | 0 | 0 | ???          |
| 1           | 0 | 0 | 0 | 0 | ???          |
| 1           | 1 | 1 | 1 | 1 | ???          |

# Nyquist Sampling Theorem


- *Reconstruction of a signal is possible when sampling frequency is greater than twice the maximum frequency of the signal being sampled*
- Human hearing can recognize frequencies up to 20kHz
- The typical sampling rate for audio is 44.1kHz. Why?
- Digital Storage Example:
  - How much space is needed for 70 minutes of music with 16 bit resolution?



$$\begin{aligned}
 & (2 \text{ channels}) \left( 16 \frac{\text{bits}}{\text{sample}} \right) \left( 44.1 \text{k} \frac{\text{samples}}{\text{second}} \right) \left( 60 \frac{\text{seconds}}{\text{minute}} \right) (70 \text{ minutes}) \\
 & \qquad \qquad \qquad = 5,927,040,000 \text{ bits}
 \end{aligned}$$

# Experiment

- Generate analog signals between VLC transceivers
  - Observe on Oscilloscope and Spectrum Analyzer
  - Transmit audio file (<http://www.wavsource.com/>)

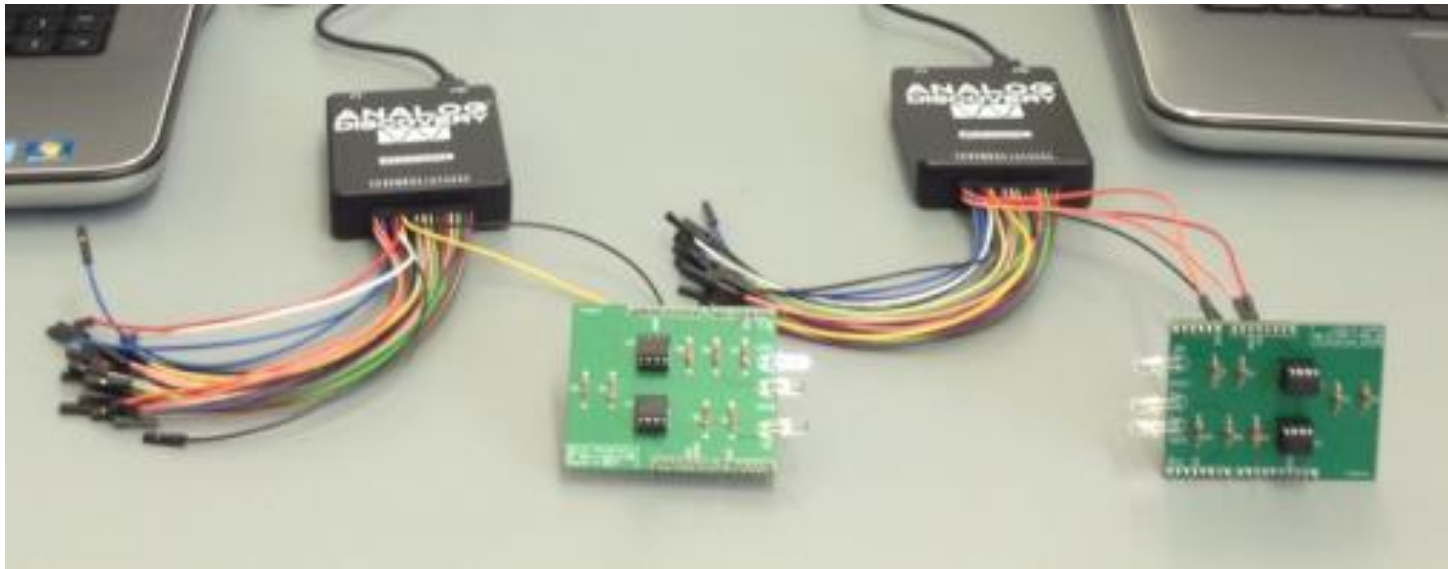

# Recap

- What did you **LEARN** today?

